

COSWICK HARDWOOD FLOORING



eight great flooring collections





# classic collection



Auburn



Charcoal



# oak

Coswick Classic Oak Collection opens a world of opportunities to be artistic about your living space. Eight elegant colors that span from sophisticated oak Charcoal to graceful oak Vanilla allow you to create a unique atmosphere in your home. Classic Oak Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.



Species: Oak  
 Grade: Select & Better  
 Finish: Lacquer  
 Durability: 1800 cycles (taber abrasion S-42)  
 Sheen: Semigloss  
 Finish warranty: 25 years  
 Structural warranty: Lifetime

Rose

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

			solid plank flooring T&G 	2-layer engineered T&G 	3-layer single strip CosLoc 
Natural		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55	107.95	127
		Length, mm:	300..1845	300..1845	300..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76	0.7	0.74
		Quantity per box, m <sup>2</sup> :	1.75	2.26	1.79
Boxes per pallet:	36	36	40		
Rose		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36, 36	36	40, 32		
Auburn		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55	107.95	127
		Length, mm:	300..1845	300..1845	300..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76	0.7	0.74
		Quantity per box, m <sup>2</sup> :	1.75	2.26	1.79
Boxes per pallet:	36	36	40		
Chestnut		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36, 36	36	40, 32		
Walnut		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36, 36	36	40, 32		
Mahogany		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55	107.95	127
		Length, mm:	300..1845	300..1845	300..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76	0.7	0.74
		Quantity per box, m <sup>2</sup> :	1.75	2.26	1.79
Boxes per pallet:	36	36	40		
Charcoal		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95	107.95	127
		Length, mm:	300..1845	300..1845	300..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76, 0.78	0.7	0.74
		Quantity per box, m <sup>2</sup> :	1.75, 1.51	2.26	1.79
Boxes per pallet:	36, 36	36	40		
Vanilla		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Select & Better	Select & Better	Select & Better
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36, 36	36	40, 32		



Chestnut

quarter sawn  
collection



Rose



Species: Oak  
Grade: Select & Better  
Finish: Lacquer  
Durability: 1800 cycles (taber abrasion S-42)  
Sheen: Semigloss  
Finish warranty: 25 years  
Structural warranty: Lifetime

Vanilla

oak

Coswick Quarter Sawn Collection offers exquisite prefinished flooring for your high-end design projects. The most remarkable feature of quarter sawn oak flooring is its exceptional grain pattern. In contrast to plain sawn flooring that is characterized by heavy grain, quarter sawn oak has delicate vertical grain with shiny reflective surface flecks. Quarter sawn flooring is highly rated for its dimensional stability. It wears slower and more evenly than traditional plain sawn flooring and does not surface check or split. Increased stability of quarter sawn flooring means that it stays flat and free from gaps through all seasons.



**CosNanoTech™ Plus**  
Finish Technology

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

		solid plank flooring T&G	
			
Natural		Thickness, mm:	19.05
		Width, mm:	82.55
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76
		Quantity per box, m <sup>2</sup> :	1.75
Rose		Thickness, mm:	19.05
		Width, mm:	82.55, 107.95
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76, 0.78
		Quantity per box, m <sup>2</sup> :	1.75, 1.51
Auburn		Thickness, mm:	19.05
		Width, mm:	82.55
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76
		Quantity per box, m <sup>2</sup> :	1.75
Chestnut		Thickness, mm:	19.05
		Width, mm:	82.55, 107.95
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76, 0.78
		Quantity per box, m <sup>2</sup> :	1.75, 1.51
Walnut		Thickness, mm:	19.05
		Width, mm:	82.55, 107.95
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76, 0.78
		Quantity per box, m <sup>2</sup> :	1.75, 1.51
Mahogany		Thickness, mm:	19.05
		Width, mm:	82.55
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76
		Quantity per box, m <sup>2</sup> :	1.75
Vanilla		Thickness, mm:	19.05
		Width, mm:	82.55, 107.95
		Length, mm:	300.1845
		Grade:	Select & Better
		Average Length, m:	0.76, 0.78
		Quantity per box, m <sup>2</sup> :	1.75, 1.51
		Boxes per pallet:	36, 36



Chestnut



Walnut

brushed & oiled  
collection



Species: Oak  
Grade: Select & Better  
Finish: Silk oil  
Sheen: Silk matte  
Structural warranty: Lifetime

Gothic

oak

Brushed & Oiled Oak Collection is designed to highlight natural richness and uniqueness of white oak. Soft portion of the wood is wire brushed away to expose deep textured grain that is complemented by beautiful knots and dramatic oak character marks. Aged look of brushed and oiled oak flooring is completed by Silk oil coating. Unlike traditional polyurethane finish that creates a strong protective film on the floor surface, oil finish penetrates the wood, preserving its natural look, feel and warmth. Brushed & Oiled Oak Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.



Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV-Oil. Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.



Antique White

		solid plank flooring T&G	2-layer engineered T&G	3-layer single strip CosLoc
Natural	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51	2.26	1.79
Boxes per pallet:	36	36	40	
Chestnut	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
Boxes per pallet:	36, 36	36	40	
Walnut	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95	107.95	127, 160
	Length, mm:	300..1845	300..1845	300..1845, 400..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	1.51	2.26	1.79, 2.2
Boxes per pallet:	36	36	40, 32	
Antique White	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127, 160
	Length, mm:	300..1845	300..1845	300..1845, 400..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36	36	40, 32	
Gothic	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127, 160
	Length, mm:	300..1845	300..1845	300..1845, 400..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36	36	40, 32	



Natural



Walnut

country  
collection

oak











Coswick Country Collection reflects unique grain texture and color of white oak. Country Collection floors are gently brushed to emphasize the unique color variation, knots and dramatic character marks of natural oak. The result is beautifully aged or 'antique' looking flooring. Country Oak Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.

Species: Oak  
Grade: 1 Common, Tavern, Tavern 2  
Finish: Silk oil  
Sheen: Silk matte  
Structural warranty: Lifetime

Antique White



Terracotta

		solid plank flooring T&G 	2-layer engineered T&G 	3-layer single strip CosLoc 	
Natural		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	1 Common	1 Common	1 Common
		Average Length, m:	0.76, 0.78	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51	2.26	1.79, 2.2
Boxes per pallet:	36, 36	36	40, 32		
Chestnut		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	1 Common	1 Common	1 Common
		Average Length, m:	0.76, 0.78	0.7	0.74, 0.94
		Quantity per box, m <sup>2</sup> :	1.75, 1.51	2.26	1.79, 2.2
Boxes per pallet:	36, 36	36	40, 32		
Walnut		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	1 Common	1 Common	1 Common
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.26
Boxes per pallet:	36, 36, 36	36	40, 32		
Antique White		Thickness, mm:	19.05	12.7	15
		Width, mm:	107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Tavern	Tavern	Tavern
		Average Length, m:	0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36	36	40, 32		
Terracotta		Thickness, mm:	19.05	12.7	15
		Width, mm:	82.55, 107.95, 127	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Tavern	Tavern	Tavern
		Average Length, m:	0.76, 0.78, 0.74	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79, 2.2
Boxes per pallet:	36, 36, 36	36	40, 32		
French Estate		Thickness, mm:	19.05	12.7	15
		Width, mm:	107.95	107.95	127, 160
		Length, mm:	300..1845	300..1845	300..1845, 400..1845
		Grade:	Tavern	Tavern	Tavern
		Average Length, m:	0.78	0.7	0.74, 0.92
		Quantity per box, m <sup>2</sup> :	1.51	2.26	1.79, 2.2
Boxes per pallet:	36	36	40, 32		
Amber		Thickness, mm:	19.05		
		Width, mm:	107.95, 127		
		Length, mm:	300..1845		
		Grade:	Tavern 2		
		Average Length, m:	0.78, 0.74		
		Quantity per box, m <sup>2</sup> :	1.51, 1.78		
Boxes per pallet:	36, 36				



Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV-Oil. Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.



Amber

uniblock  
flooring

oak  
ash

Coswick Uniblock Collection consists of specialty oak and ash flooring that is perfect for any home, apartment or condo. Uniblock flooring comes in preassembled blocks of 4, 5 and 6 bars and is available in five classic colors. Uniblock flooring requires easy glue down installation over concrete or wood subfloor.



**CosNanoTech™ Plus**  
Finish Technology

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

Species: Oak, Ash  
Grade: Select & Better  
Finish: Lacquer, Lacquer matte  
Durability: 1800 cycles (taber abrasion S-42)  
Sheen: Semigloss, Matte  
Finish warranty: 25 years  
Structural warranty: Lifetime

Rose

solid hardwood flooring T&G



Natural		Thickness, mm:	19,05
		Width, mm:	228,6
		Length, mm:	228,6
		Grade:	Select & Better
		Species:	Oak
		Quantity per box, m <sup>2</sup> :	0,731
Rose		Thickness, mm:	19,05
		Width, mm:	228,6
		Length, mm:	228,6
		Grade:	Select & Better
		Species:	Oak
		Quantity per box, m <sup>2</sup> :	0,731
Chestnut		Thickness, mm:	19,05
		Width, mm:	228,6
		Length, mm:	228,6
		Grade:	Select & Better
		Species:	Oak
		Quantity per box, m <sup>2</sup> :	0,731
Avalanche		Thickness, mm:	19,05
		Width, mm:	228,6
		Length, mm:	228,6
		Grade:	Select & Better
		Species:	Ash
		Quantity per box, m <sup>2</sup> :	0,731
Moonlight		Thickness, mm:	19,05
		Width, mm:	228,6
		Length, mm:	228,6
		Grade:	Select & Better
		Species:	Ash
		Quantity per box, m <sup>2</sup> :	0,731
		Boxes per pallet:	72



Avalanche

classic  
collection



Avalanche

ash

Coswick Classic Ash Collection features strikingly stunning flooring that is distinguished by consistent color, clarity and exquisite prominent grain pattern.

This collection is available in two surface finishes: semigloss lacquer coating (Natural, Avalanche, Wenge) and matte silk oil (Vintage, Mocca, Moonlight, Cloudy).

Classic Ash Collection is offered as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.



**CosNanoTech™ Plus**  
Finish Technology

**Silk·Oil**  
BRUSHED

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV-Oil. Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.

	solid plank flooring T&G	2-layer engineered T&G	3-layer single strip CosLoc	
Natural				
	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	Select & Better/Lacquer	Select & Better/Lacquer	Select & Better/Lacquer
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40	
Avalanche	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	Select & Better/Lacquer, Oil	Select & Better/Lacquer, Oil	Select & Better/Lacquer, Oil
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40
Vintage	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	Select & Better/Oil	Select & Better/Oil	Select & Better/Oil
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40
Mocca	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	1 Common/Oil	1 Common/Oil	1 Common/Oil
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40
Wenge	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	Select & Better/Lacquer	Select & Better/Lacquer	Select & Better/Lacquer
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40
Moonlight	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	Select & Better/Oil	Select & Better/Oil	Select & Better/Oil
	Average Length, m:	0.76, 0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	2.26	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	36	40
Cloudy	Thickness, mm:	19.05	12.7	15
	Width, mm:	82.55, 107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade/Finish:	1 Common/Oil	1 Common/Oil	1 Common/Oil
	Average Length, m:	0.76, 0.78, 0.74	0.74	0.74
	Quantity per box, m <sup>2</sup> :	1.75, 1.51, 1.78	1.79	1.79
	Boxes per pallet, m <sup>2</sup> :	36, 36, 36	40	40

Species: Ash  
Grade: Select & Better, 1 Common

Finish: Lacquer  
Durability: 1800 cycles (taber abrasion S-42)  
Sheen: Semigloss  
Finish warranty: 25 years  
Structural warranty: Lifetime

Finish: Silk oil  
Sheen: Silk matte  
Structural warranty: Lifetime

Mocca



Vintage

signature  
collection

ash

Coswick Signature Ash Collection features seven designer colors. Any one of them- be it delicate Ash Moonlight, extravagant Ash Brandy or refined Black Emerald- will add a signature style to any home, office or condo. Signature Ash Collection is available as solid hardwood flooring, 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.



**CosNanoTech™ Plus**  
Finish Technology

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

Species: Ash  
Grade: Select & Better  
Finish: Lacquer matte  
Durability: 1800 cycles (taber abrasion S-42)  
Sheen: Matte  
Finish warranty: 25 years  
Structural warranty: Lifetime

Silvery



Moonlight

		solid plank flooring T&G	2-layer engineered T&G	3-layer single strip CosLoc
Moonlight	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Silvery	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Cappuccino	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Almond	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Brandy	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Cherry	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40
Black Emerald	Thickness, mm:	19.05	12.7	15
	Width, mm:	107.95, 127	107.95	127
	Length, mm:	300..1845	300..1845	300..1845
	Grade:	Select & Better	Select & Better	Select & Better
	Average Length, m:	0.78, 0.74	0.7	0.74
	Quantity per box, m <sup>2</sup> :	1.51, 1.78	2.26	1.79
	Boxes per pallet:	36, 36	36	40



Cappuccino



Black Emerald



exotic  
collection

american walnut  
jatoba  
santos mahogany  
cumaru

Coswick Exotic Collection features flooring manufactured from American Walnut, Jatoba (Brazilian Cherry), Santos Mahogany and Cumaru (Brazilian Teak). Wood of these exotic species has original structure, depth of texture and colour. The resulting floor has a captivating earthy look and a very warm feel. Exotic Collection is available as 2-layer engineered tongue and groove flooring and 3-layer engineered single strip CosLoc flooring.



- Species: American Walnut
- Grade: Select & Better, Natural, Traditional
  
- Species: Jatoba, Santos Mahogany, Cumaru
- Grade: Select & Better
  
- Finish: Lacquer
- Durability: 1800 cycles (taber abrasion S-42)
- Sheen: Semigloss
- Finish warranty: 25 years
- Structural warranty: Lifetime
  
- Finish: Silk oil
- Sheen: Silk matte
- Structural warranty: Lifetime

Jatoba

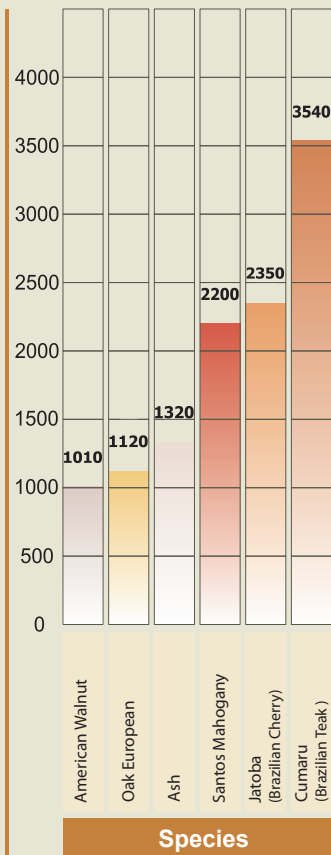
CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.



American Walnut Classic

		2-layer engineered T&G	3-layer single strip CosLoc
American Walnut Natural	Thickness, mm:	12.7	15
	Width, mm:	107.95	127, 160
	Length, mm:	300..1845	300..1845, 400..1845
	Grade/Finish:	Select & Better/Lacquer	Select & Better/Lacquer
	Average Length, m:	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	2.26	1.79, 2.2
American Walnut Natural	Boxes per pallet:	36	40, 32
	Thickness, mm:	12.7	15
	Width, mm:	107.95	127, 160
	Length, mm:	300..1845	300..1845, 400..1845
	Grade/Finish:	Traditional/Lacquer	Traditional/Lacquer
	Average Length, m:	0.7	0.74, 0.92
American Walnut Classic	Quantity per box, m <sup>2</sup> :	2.26	1.79, 2.2
	Boxes per pallet:	36	40, 32
	Thickness, mm:	12.7	15
	Width, mm:	107.95	127, 160
	Length, mm:	300..1845	300..1845, 400..1845
	Grade/Finish:	Natural/Lacquer	Natural/Lacquer
Jatoba (Brazilian Cherry) Natural	Average Length, m:	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	2.26	1.79, 2.2
	Boxes per pallet:	36	40, 32
	Thickness, mm:	12.7	15
	Width, mm:	107.95	127, 160
	Length, mm:	300..1845	300..1845, 400..1845
Santos Mahogany Natural	Grade/Finish:	Select & Better/Lacquer	Select & Better/Lacquer
	Average Length, m:	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	2.26	1.79, 2.2
	Boxes per pallet:	36	40, 32
	Thickness, mm:	12.7	15
	Width, mm:	107.95	127, 160
Cumaru (Brazilian Teak) Natural	Length, mm:	300..1845	300..1845, 400..1845
	Grade/Finish:	Select & Better/Oil	Select & Better/Oil
	Average Length, m:	0.7	0.74, 0.92
	Quantity per box, m <sup>2</sup> :	2.26	1.79, 2.2
	Boxes per pallet:	36	40, 32
	Thickness, mm:	12.7	15













Janka hardness



Cumaru



Santos Mahogany

	Product Use	Construction	Dimensions	Features	Properties	Installation Methods
 <p>Solid hardwood flooring T&amp;G</p>	<p>Solid hardwood flooring should be installed on or above grade. Nail or staple down installation over wooden subfloor.</p> 	 <p>100% solid hardwood. Wear layer is 7 mm thick and can be sanded up to 6 times. Solid flooring boards enhance structural stability of the floor.</p>	 <p>Thickness: 19.05 mm Width: 82.55 mm, 107.95 mm, 127 mm Length: from 300 to 1845 mm Tongue-and-groove profile. Microbevel on all 4 sides.</p>	<p>Coswick solid hardwood flooring is a 100% natural product. Solid wood floors provide exceptional sound and thermo insulation. Beautiful grain texture of natural wood brings a sense of warmth and authenticity to any space. Coswick solid hardwood floors come with a lifetime structural warranty.</p>	<p>Solid hardwood flooring is 100% natural product that responds to air humidity variations. During warm and humid summers, it is not unusual for wood to expand. Winters and dry climates can cause wood to contract. In order to avoid. Noticeable movements in your floors, relative indoor humidity level should be kept at 45-55% throughout the year.</p>	<p>Installation is fast and easy. Planks need to be nailed or stapled down over wooden subfloor.</p>
 <p>2-layer engineered flooring T&amp;G</p>	<p>2-layer engineered flooring can be installed above, on or below grade. Nail down over wooden subfloor; or glue down over concrete or wooden subfloor, sound membrane or radiant heat system.</p> 	 <p>Top wear layer is 4 mm thick and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood veneers have no internal checks that might cause face splits in lamella later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance. Plywood core consists of 7 cross-layers of birch.</p>	 <p>Thickness: 12.7 mm Width: 107.95 mm Length: from 300 to 1845 mm Tongue-and-groove profile. Microbevel on all 4 sides.</p>	<p>High-adhesion polyurethane glues are used to bond top hardwood veneer to plywood base. Extra strong bonding ensures that no delamination occurs even under elevated moisture conditions. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly.</p>	<p>Coswick 2-layer engineered T&amp;G hardwood floors have minimal movement and maintain superb dimensional stability through seasonal humidity fluctuations.</p>	<p>To install, glue down over concrete, plywood or wooden subfloor or sound membrane. Or, nail down over wooden subfloor.</p>
 <p>3-layer engineered single strip CosLoc</p>	<p>Floating installation over concrete or wooden subfloor. Can be installed above, on or below grade.</p> 	 <p>Top wear layer is 4 mm thick and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood veneers have no internal checks that might cause face splits in lamella later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance. Middle layer is made of cross-laid interconnected solid birch bars. Thickness of the middle layer is 8 mm. Cork compensators are added every 20 cm to help balance internal stress, increase dimensional stability of the plank and eliminate squeaking in floors. Bottom layer is 3 mm solid birch lamella.</p>	 <p>Thickness: 15 mm Width: 127 mm, 160 mm Length: from 300 to 1845 mm, from 400 to 1845 mm CosLoc 5G locking system is licensed by Valinge Innovation (Sweden). Microbevel on all 4 sides.</p>	<p>High-adhesion polyurethane glues are used to bond top hardwood veneer to plywood base. Extra strong bonding ensures that no delamination occurs even under elevated moisture conditions. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly.</p>	<p>Coswick uses solid birch for middle and bottom layers instead of traditional softwood. This helps to enhance internal balance of hardwood planks and reduce possibility of twisting or warping. Additionally, solid middle layer greatly improves thermo- and sound insulating properties of engineered flooring. Coswick 3-layer engineered hardwood floors have minimal movement and maintain superb dimensional stability through seasonal humidity fluctuations.</p>	<p>3-layer engineered single strip CosLoc flooring is floated over subfloor or underlayment. Planks do not need to be glued down, nailed or stapled. Single Cosloc strips are interlocked on all 4 sides. If needed, installed Cosloc floors can be taken apart and re-installed elsewhere.</p>

# FINISHING SYSTEMS



## CosNanoTech+ Lacquer Finish

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors.

CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminum oxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance.

CosNanoTech+ finish is distinguished by its:

- Clarity. Finished surface is clear and transparent. All you see is wood in its natural beauty.
- Smoothness. Finished surface is very smooth to touch.
- Durability. Innovative CosNanoTech+ finish is 10 times more wear-resistant than traditional urethane finishes. Coswick CosNanoTech+ prefinished floors are covered by 25-year finish wear warranty.
- Antibacterial Shield. CosNanoTech+ finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.
- Environmentally friendly. CosNanoTech+ prefinished solid hardwood floors have zero VOC emissions. CosNanoTech+ finished engineered flooring is also 100% formaldehyde free.
- Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.



## Silk UV-Oil Finish

Silk Oil finish consists of 4 coats of deep penetrating oil. Unlike lacquer finish, UV-Oil does not seal wood grains. Oil penetrates the wood and crystallizes in its fibers. As a result, UV-Oil floors have beautiful open grains that highlight the texture of natural wood.

Silk UV-Oil is distinguished by its:

- Smoothness. UV-Oil finished floors feel warm and silky smooth under your feet. Walking barefoot on oiled floors feels incredible!
- Universal use: Coswick Silk UV-Oil floors are recommended for residential as well as commercial use. Water repellent properties of UV-Oil finish make oiled flooring the perfect choice for lakeside cottages, bars and restaurants.
- UV-Oil is very forgiving. Because the finish is matte, small scratches and dents will not be visible on the floor surface, but will blend in with the natural wood grain texture.
- Easy restoration and repair. If cared for correctly, oiled flooring will never need to be fully sanded and refinished. Depending on the amount of traffic, your Coswick UV-Oil floors will need to be re-oiled every few years. Coswick recovery oil can be applied directly over the old finish.
- Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.



Finishing systems Coswick	lacquer	lacquer matte	lacquer matte enhanced	silk oil
Sheen, GU	semigloss 29-35 GU/60°	matte 11-17 GU/60°	matte 11-17 GU/60°	silk matte 11-17 GU/85°
Scratch Classification according to EN 14354	SC3	SC3	SC3	not regulated
Durability, EN 13329	1800 cycles taber abrasion S-42	1800 cycles taber abrasion S-42	3000 cycles taber abrasion S-42	not regulated
Useability	in residential areas	in residential areas	in residential and public areas	in residential and public areas
Finish warranty, years	25	25	35 (in residential areas)	not regulated



# GRADES

## Select and Better

Select and Better is the highest grade of hardwood. It has uniform grain texture, mild color variations are produced by differences in natural heartwood and sapwood. The face may contain unlimited sound sapwood and occasional small burls. Light brown streaks may not extend over the entire length of piece. Occasional non-contrasting restored knots (10mm or smaller) are admitted on planks stained in dark colors as long as they do not stand out against the floor surface.

## Quarter Sawn Select and Better

Quarter Sawn flooring is considered 'vertically grained' as the annual growth rings make a 45-90 degree angle with the plank surface. Grain lines are mostly parallel to the length of planks. Modular ray flecks are present and are more than 1/16" wide.

This is the highest grade of hardwood. It has uniform grain texture, mild color variations are produced by differences in natural heartwood and sapwood. The face may contain unlimited sound sapwood and occasional small burls. Light brown streaks may not extend over the entire length of piece. Occasional non-contrasting restored knots (10mm or smaller) are admitted on planks that are stained in dark colors as long as they do not stand out against the floor surface.

## 1 Common

The face of a plank may contain unlimited sound sapwood. Color variation is prominent. Small burls, light brown streaks, restored knots up to 25mm, properly filled open checks and worm holes, slight imperfections in face work (torn grain) and burns are admitted. When stained in a dark color, surface appears uniform in shade and texture, making knots etc barely discernible. 1 Common is a tasteful floor where prominent variation is expected.

## Tavern

The face of a plank may contain prominent color variation, unlimited burls, brown streaks, tight knots and properly filled open knots, as well as worm holes. Imperfections in the face work (torn grain) and burns are admitted. Knots and other imperfections are intentionally highlighted in order to bring attention to the natural beauty and uniqueness of oak grain texture.

## Tavern 2

The face of a plank may contain prominent color variation, unlimited burls, brown streaks, open or filled knots of any size, and worm holes. Open splits and knots create an effect of antique wood and emphasize authenticity of hardwood oak flooring.



# PRODUCTS



## flooring care products



Service Kit

**Coswick Service Kit** is designed to clean solid and engineered wood floors that have a lacquer or oil finish. The kit includes a Microfiber mop cloth and ready-to-use Coswick Hardwood Cleaner. Microfiber mop cloth:

- Machine washable;
- Very effective against dust;
- Highly absorbent and long lasting.

Ready-to-use Hardwood Cleaner:

- Perfect for regular cleaning of finished wooden floors;
- Excellent grease and dirt removing properties;
- Available for UV-lacquered and UV-oiled Coswick floors;
- Non-abrasive, leaves no residue;
- Delicate scent.

Cleaner for Lacquer



**Coswick Cleaner** is designed for regular cleaning of UV-lacquer, waterborne or polyurethane finished hardwood floors. The cleaner comes ready-to-use. It has excellent grease and dirt removing properties. It is non-abrasive and leaves no residue. The cleaner has a delicate scent. 0.5 litres per bottle.

**Coswick Cleaner Concentrate** is designed for regular cleaning of UV-lacquer, waterborne or polyurethane finished floors. To prepare Coswick Cleaner, simply dilute with water at 1:200 ratio. The cleaner has excellent grease and dirt removing properties. It is non-abrasive and leaves no residue. 0.5 litres per bottle; a single bottle will prepare up to 100 litres of Coswick Cleaner.

Cleaner for Oil



**Coswick Cleaner** is designed for regular cleaning of UV-oil and oil/wax finished floors. The cleaner comes ready-to-use. It has excellent grease and dirt removing properties. It is non-abrasive and leaves no residue. The cleaner has a delicate scent. 0.5 litres per bottle.

**Coswick Cleaner Concentrate** is designed for regular cleaning of UV-oil and oil/wax finished floors. To prepare Coswick Cleaner, simply dilute with water at 1:100 ratio. The cleaner has excellent grease and dirt removing properties. It is non-abrasive and leaves no residue. 0.5 litres per bottle; a single bottle will prepare up to up to 50 litres of Coswick Cleaner.

Stain



**Coswick Stain** Stains for application on bare wood. Stains are available in all Coswick colors and are recommended for on-site staining of elements of interior: moldings, trims, staircases etc. 0.5 litres per can.

Oil Renewer Paste Filler



**Coswick Oil Renewer** Care oil for UV-oiled and oil/wax floors, manufactured with modified alkyd resins and natural oils. It is very durable and creates a strong protective elastic silk film. Coswick Oil Renewer is recommended for recovering UV-oiled and oiled floors without sanding. It can be used to touch up only the floor areas that require renewal, such as isolated patches in high traffic areas. 1.0 litre per can.

**Coswick Paste Filler** Ready-to-use paste for filling cracks, splits or holes on bare unfinished or stained finished wood. Paste Filler is available in all Coswick colors.

Wax Filler



**Coswick Wax Filler** Ready-to-use wax for quick repairs of small damages in floors with all types of finish. Wax filler is available in all Coswick colors.

# MOLDINGS

Available in All Coswick Colors and Finishes

			solid plank flooring T&G	3-layer single strip CosLoc	2-layer engineered T&G
Stair Nosing	Oak	solid			
	Ash	solid			
	American walnut	solid			
Reducer	Oak	solid			
	Ash	solid			
	American walnut	solid			
Carpet Reducer	Oak	solid			
	Ash	solid			
	American walnut	solid			
Baseboard №1	Oak	solid			
	Ash	solid			
Baseboard №2	Oak	solid			
	Ash	solid			
Baseboard №3	Oak	veneer			
	Ash	veneer			
	American walnut	veneer			
Baseboard №4	Oak	veneer			
	Ash	veneer			
	American walnut	veneer			





**Coswick Hardwood Inc.**  
3615-10 Laird Rd., Mississauga, ON, L5L 5Z8, Canada  
Tel. +1-905-569-2045, Fax: +1-905-569-9670  
E-mail: [mail@coswick.com](mailto:mail@coswick.com)

[www.coswick.com](http://www.coswick.com)